
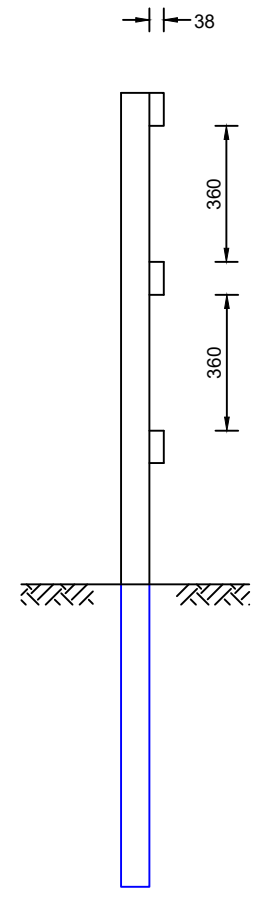


1800 max

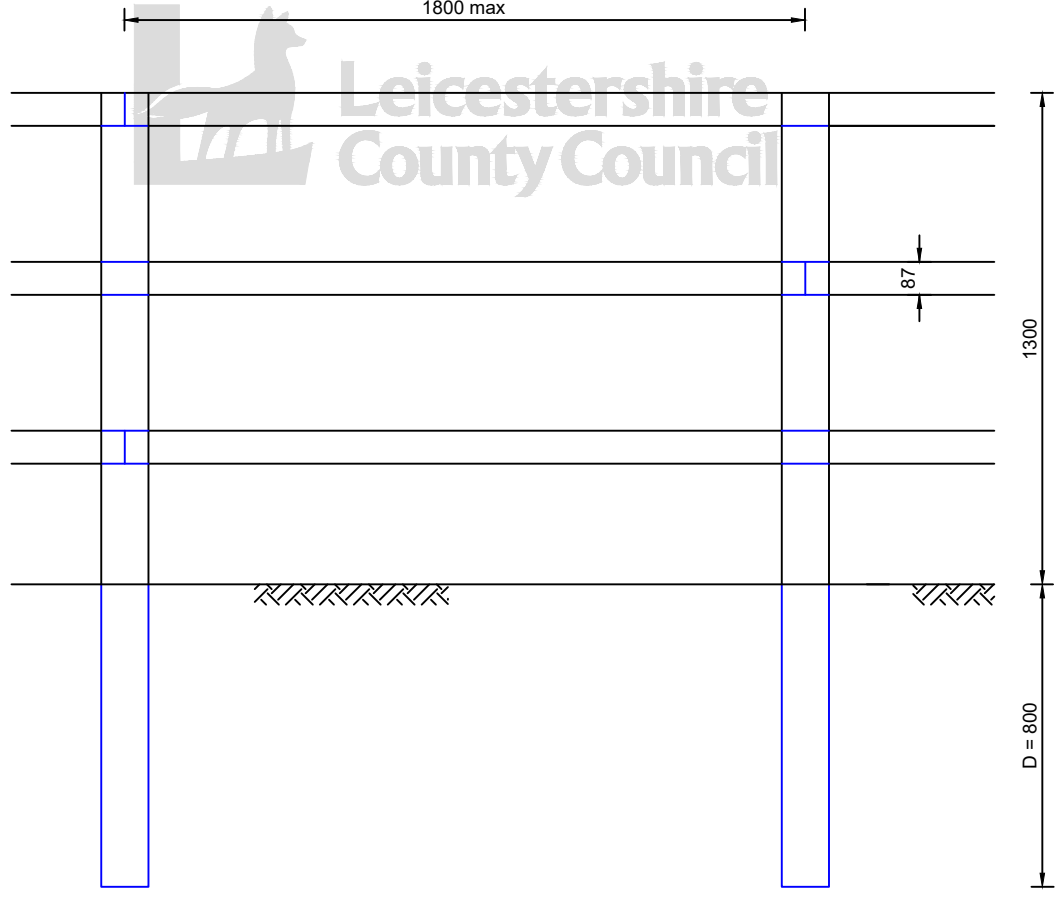

RAIL SECTION	MAIN POSTS LENGTH	SECTION	NUMBER OF RAILS	HEIGHT TO TOP OF TOP RAIL	VALUE OF D
38 x 87	2100	75 x 125	3	1300	800

NOTES:

GENERAL

1. All dimensions are in millimetres unless otherwise stated.
2. This type of fencing is not intended for accommodation works applications but for protective fencing alongside cycleways where steep embankments or other dangers are present.
3. Where the fence is erected alongside a cycleway, the rails should be nailed on the cycleway side of the posts and set back 500mm from the edge of the cycleway.
4. Fencing to follow the ground profile with small adjustments to height as necessary to obtain flowing alignment.

MATERIALS

1. All timber shall comply with 'Specification for Highway Works - 6th Edition' Clause 304 and CCA preservation to BS 8417.
2. Nails shall be 4mm x 100mm galvanised in accordance with the requirements of BS EN ISO 1461.

ERECTION

1. See Standard Drg No **SD/300/16**.



©Crown copyright 2015. All rights reserved. Use of this image is limited to viewing on-line and printing one copy. Leicestershire County Council. 100019271.

DRAWING NUMBER	DATE		
SD/300/19	APRIL 2024		
AUTOCAD REF	SCALE		
K:\GENERAL\ID9997\STD\DRG\STD DRGS 2019	NOT TO SCALE	0	01.04.2024
Rev	Date	Supersedes Dwg. SD/3/19 - September 2002	
		Notes on Revision	