



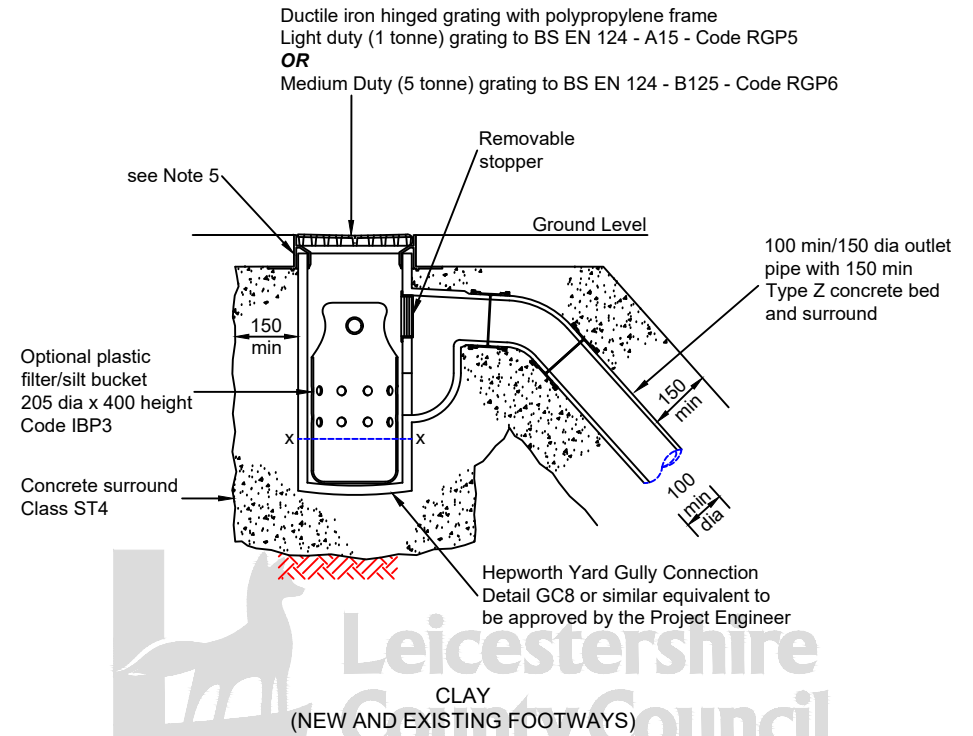

**Leicestershire
County Council**

- NOTES:
- All dimensions are in millimetres unless otherwise stated.
 - See Drg No **SD/500/11** for General Notes.
 - See Drg No **SD/500/12** for notes on setting and adjustment of ironwork.
 - On existing footways, where shallow services are encountered on site, the bottom section of the gully pot may be cut on diameter 'x'-'x' and suitably bedded on insitu concrete base, subject to approval of the Project Engineer.
 - The depth of the gully can be increased by up to 300mm by fitting a 225mm coupling Code SC1/5 and a 300mm high raising piece Code SP030/5 between the frame and the gully body.

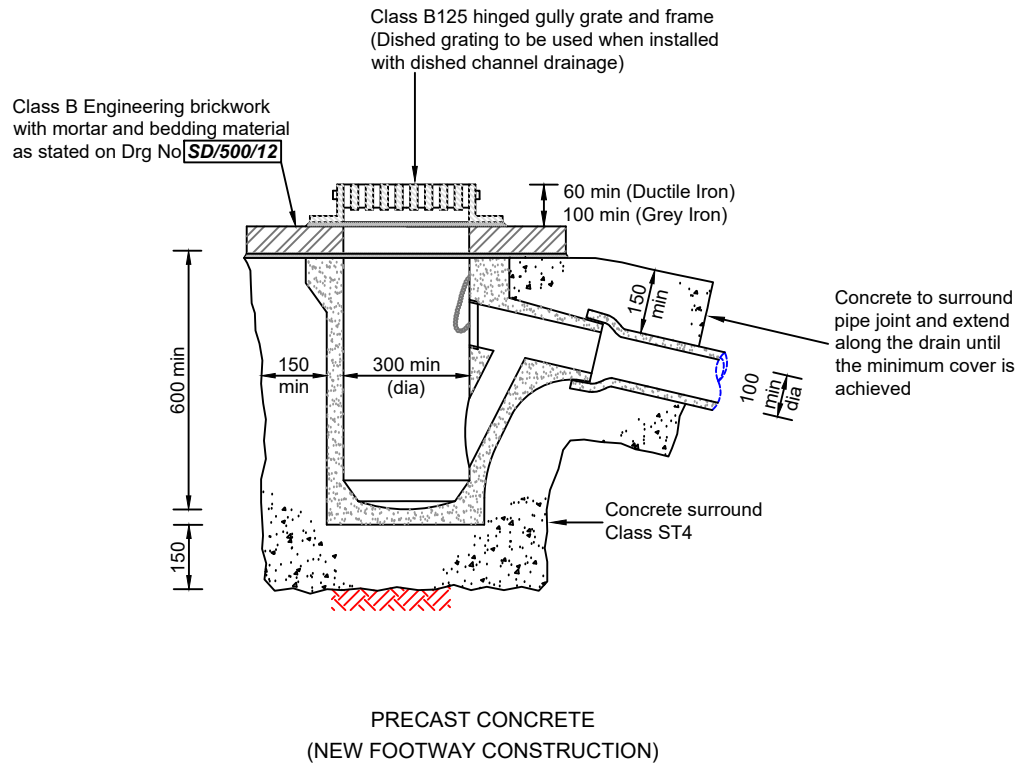

©Crown copyright 2015. All rights reserved. Use of this image is limited to viewing on-line and printing one copy. Leicestershire County Council. 100019271.



ENVIRONMENT AND
TRANSPORT DEPARTMENT

TITLE:

TRAPPED FOOTPATH GULLY

DRAINAGE

DRAWING NUMBER	DATE		
SD/500/14	APRIL 2024		
AUTOCAD REF	SCALE		
K:\GENERAL\ID9997\STDDRG\STD DRGS 2015	NOT TO SCALE	0	01.04.2024
Rev	Date	Supersedes Dwg. SD/5/14 - September 2002	
		Notes on Revision	