NOTES:

1. All dimensions are in millimetres unless otherwise stated.
2. Drain trenches are to be dug to the specified depth in true lines and gradients with a width of 600mm.
3. The trench shall be backfilled with type D filter material which shall be hard, clean, crushed rock excluding such materials containing ironstone, limestone or other calcium rich materials to the grading given below:-

BS SIEVE SIZE	PERCENTAGE PASSING
75mm	100
63mm	85 - 100
50mm	0 - 10
37.5mm	0 - 5

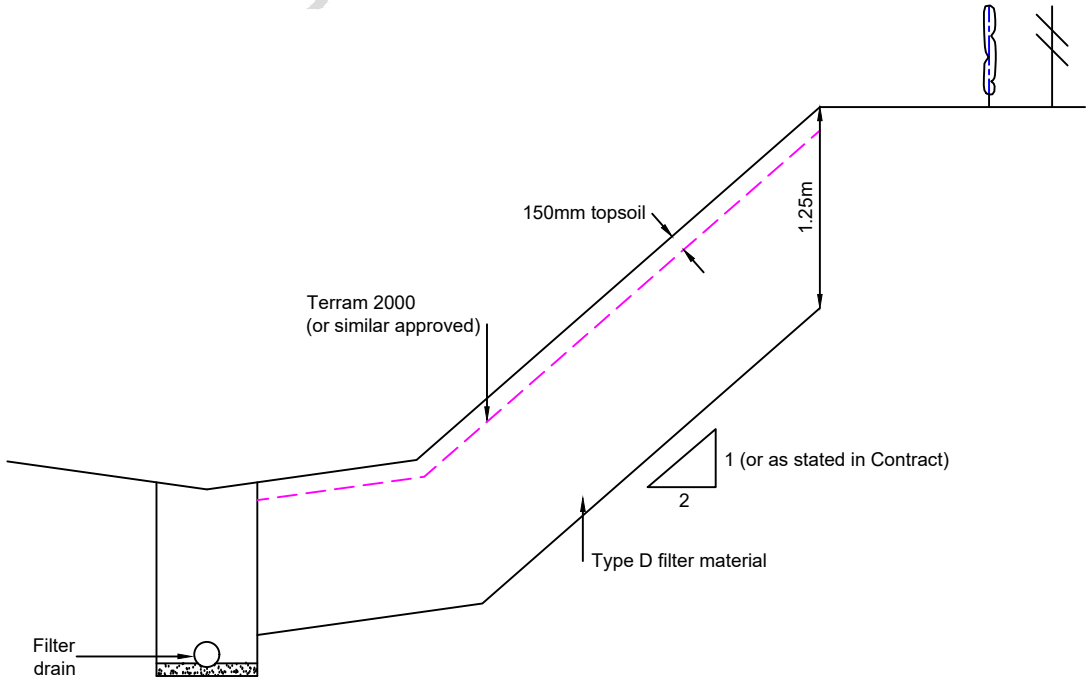

©Crown copyright 2015. All rights reserved. Use of this image is limited to viewing on-line and printing one copy. Leicestershire County Council. 100019271.

Leicestershire County Council
ENVIRONMENT AND TRANSPORT DEPARTMENT

TITLE:

DRAINAGE

BATTER DRAINS

DRAWING NUMBER	DATE
SD/500/36	APRIL 2024
AUTOCAD REF	SCALE
K\GENERAL\D9997STDDRG\STD DRGS 2015	NOT TO SCALE

Rev	Date	Notes on Revision
0	01.04.2024	Supersedes Dwg. SD/5/36 - September 2002