


- NOTES:
1. All dimensions are in millimetres unless otherwise stated.

2. Design to comply with BS EN 40-3-1.

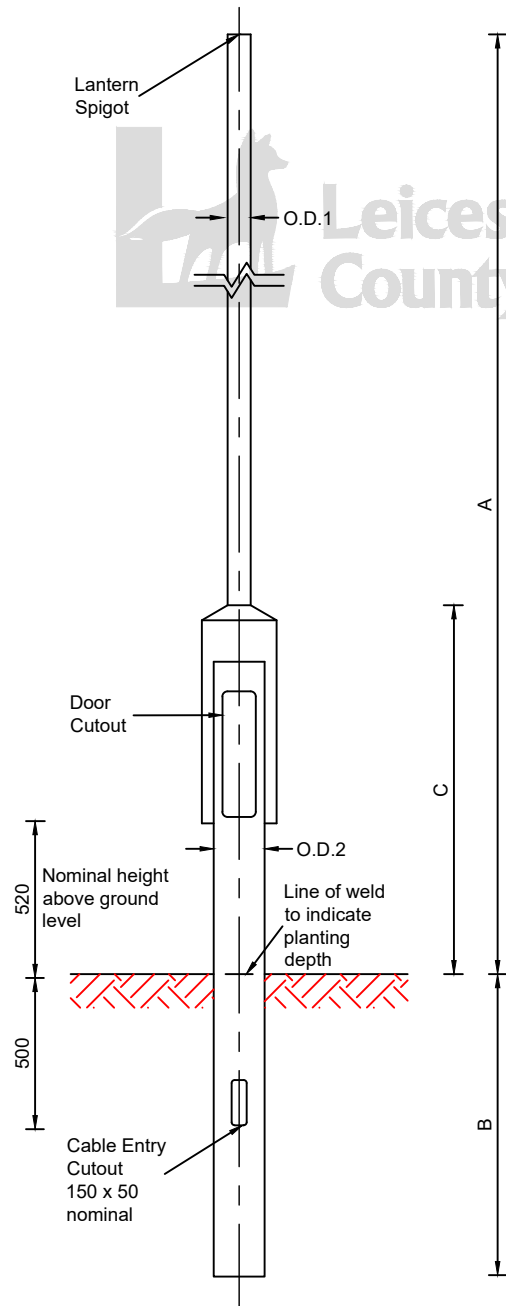

COLUMN HEIGHT	DIMENSION A	DIMENSION B	DIMENSION C	O.D.1	O.D.2	DOOR APERTURE	SPIGOT DIMENSIONS
5	5000	800	1220	76	168	415 x 110	76
6	6000	1000	1220	76	168	415 x 110	76
8	8000	1200	1220	89	168	415 x 110	76 x 76

BS EN 40 COLUMN SPECIFICATION STANDARD REQUIREMENTS

MEAN AVERAGE WIND SPEED = 22m/sec
SITE ALTITUDE = AVERAGE 150m
TERRAIN TYPE GROUP A COLS = II, GROUP B TYPE COLS = III
TOPOGRAPHY = 1.0
RATIONALISED WIND SPEED = MEDIUM
SAFETY FACTOR = CLASS B
DEFLECTION = CLASS 3
FATIGUE CHECK = BD 26/04
ROAD SIGN ATTACHMENT = CLASS A
FOUNDATION TYPE = AVERAGE
COLUMN FINISH = G1



©Crown copyright 2015. All rights reserved. Use of this image is limited to viewing on-line and printing one copy. Leicestershire County Council. 100019271.